REV.	Description	Date
A		
B		

Note: Thumbscrews are being shortened to protrude approx 3.4 mm from the face of the connector and prevent interference with mating connector.

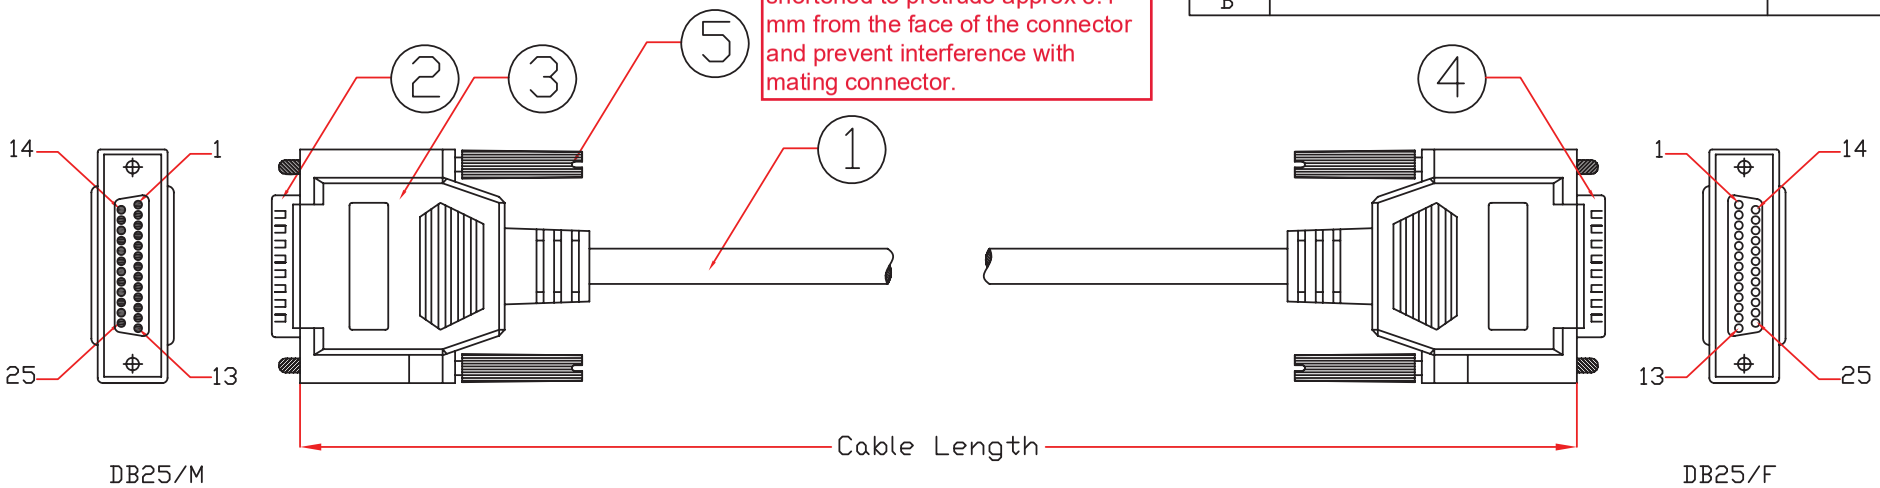

Cross Section

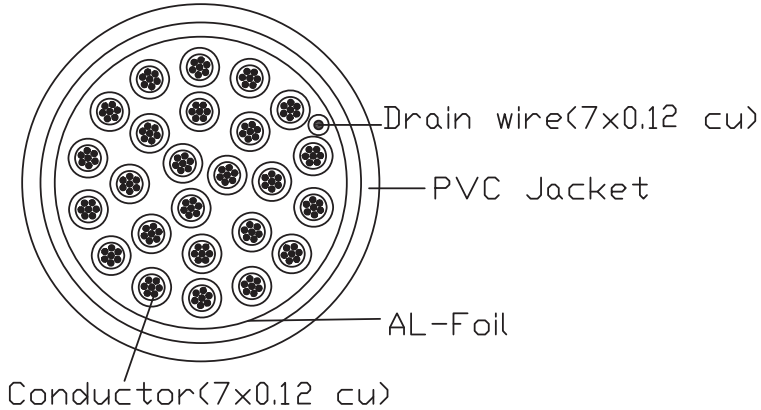

Pin Assignment

DB25 Male	DB25 Female	DB25 Male	DB25 Female
1	1	14	14
2	2	15	15
3	3	16	16
4	4	17	17
5	5	18	18
6	6	19	19
7	7	20	20
8	8	21	21
9	9	22	22
10	10	23	23
11	11	24	24
12	12	25	25
13	13	G	G

Part No.	Cable Length
DB25MF	1.83M

No.	Specifications
5	4-40 Molded Thumb Screw, Black
4	DB25 Female W/Gold Plating Contacts
3	Black Molded PVD Hood
2	DB25 Male W/Gold Plating Contacts
1	25C (28AWG/7*0.12) +Drain (28AWG/7*0.12) Wire, w/AL-Foil, Black Outer PVC Jacket

Bom List

Item Number	DB25MF	Drawer	
Description	DB25 Male to DB25 Female Molded	Checked	
		Approved	
Material		Scale	
	A	Unit	MM
Drawing No:			
Remake	ROHS Compliant		