


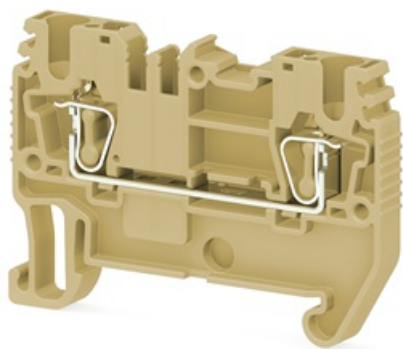

Klemsan®

311050 SRD 2.5

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V0
	Packing Unit	50
	Weight (g)	—
Dimensions	Width	5,2 mm
	Length	50,20 mm
	Height (MR 32)	— mm
	Height (MR 35x7.5)	mm
TSE / CE Technical Data	Nominal Voltage	800 V ~
	Nominal Current	24 A (2.5 mm ² için) / 24 A (at 2.5 mm ²) A
	Cross Section	mm ²
	Norm	EN60947-7-1
VDE Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	mm ²
	VDE Norm	
UL / CSA Technical Data	Nominal Voltage	V ~
	Nominal Current	A
	Cross Section	AWG/28-12
ATEX Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	
Connection Data	Minimum solid strand cross section	0,08 mm ²

Maximum solid Strand cross section	4 mm ²
Minimum fine Strand cross section	0,14 mm ²
Maximum fine strand cross section	2,5 mm ²
AWG Conductor Range	28-12
Connection Type	Yaylı bağlantı / Spring connection
Insulation Stripping length	10 mm
Tightening torque	— Nm

Avrupa standartlarına uygunluk belgesi - CE Certificate

UL Sertifikası - UL Certificate

Rusya Onaylı Denizcilik Sertifikası - Rusya Denizcilik Certificate

	Order Info
	311059
	311050
	311051
	311052
	311053
	311054
	311056
	311057
	311055