


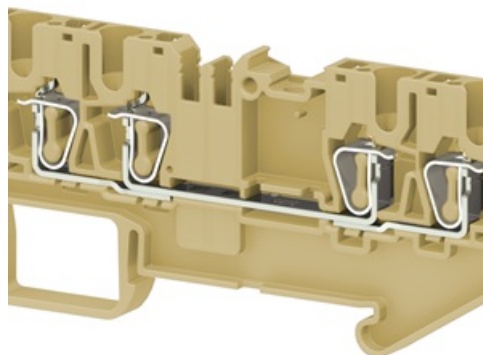

# Klemsan®

## 311110 SRD 2.5C

| General Product Information | Insulating material                | PA              |
|-----------------------------|------------------------------------|-----------------|
|                             | Inflammability class acc. to UL 94 | V0              |
|                             | Packing Unit                       | 50              |
|                             | Weight (g)                         | —               |
| Dimensions                  | Width                              | mm              |
|                             | Length                             | mm              |
|                             | Height (MR 32)                     | mm              |
|                             | Height (MR 35x7.5)                 | mm              |
| TSE / CE Technical Data     | Nominal Voltage                    | V ~             |
|                             | Nominal Current                    | A               |
|                             | Cross Section                      | mm <sup>2</sup> |
|                             | Norm                               |                 |
| VDE Technical Data          | Nominal Voltage                    | V ~             |
|                             | Nominal Current                    | A               |
|                             | Cross Section                      | mm <sup>2</sup> |
|                             | VDE Norm                           |                 |
| UL / CSA Technical Data     | Nominal Voltage                    | V ~             |
|                             | Nominal Current                    | A               |
|                             | Cross Section                      |                 |
| ATEX Technical Data         | Nominal Voltage                    | V ~             |
|                             | Nominal Current                    | A               |
|                             | Cross Section                      |                 |
| Connection Data             | Minimum solid strand cross section | mm <sup>2</sup> |

|                                    |                                    |
|------------------------------------|------------------------------------|
| Maximum solid Strand cross section | mm <sup>2</sup>                    |
| Minimum fine Strand cross section  | mm <sup>2</sup>                    |
| Maximum fine strand cross section  | mm <sup>2</sup>                    |
| AWG Conductor Range                |                                    |
| Connection Type                    | Yaylı bağlantı / Spring connection |
| Insulation Stripping length        | mm                                 |
| Tightening torque                  | Nm                                 |
|                                    |                                    |
|                                    |                                    |

Avrupa standartlarına uygunluk belgesi - CE Certificate

UL Sertifikası - UL Certificate

Rusya Onaylı Denizcilik Sertifikası - Rusya Denizcilik Certificate

|                                                                                    | Order Info |
|------------------------------------------------------------------------------------|------------|
|  | 311119     |
|  | 311110     |
|  | 311111     |
|  | 311112     |
|  | 311113     |
|  | 311114     |
|  | 311115     |
|  | 311116     |
|  | 311117     |