


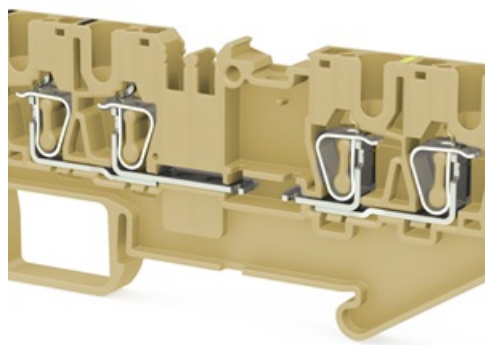

Klemsan®

311140 SRD 2.5Cx2

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V0
	Packing Unit	50
	Weight (g)	—
Dimensions	Width	mm
	Length	mm
	Height (MR 32)	mm
	Height (MR 35x7.5)	mm
TSE / CE Technical Data	Nominal Voltage	V ~
	Nominal Current	A
	Cross Section	mm ²
	Norm	
VDE Technical Data	Nominal Voltage	V ~
	Nominal Current	A
	Cross Section	mm ²
	VDE Norm	
UL / CSA Technical Data	Nominal Voltage	V ~
	Nominal Current	A
	Cross Section	
ATEX Technical Data	Nominal Voltage	V ~
	Nominal Current	A
	Cross Section	
Connection Data	Minimum solid strand cross section	mm ²

Maximum solid Strand cross section	mm ²
Minimum fine Strand cross section	mm ²
Maximum fine strand cross section	mm ²
AWG Conductor Range	
Connection Type	Yaylı bağlantı / Spring connection
Insulation Stripping length	mm
Tightening torque	Nm

Avrupa standartlarına uygunluk belgesi - CE Certificate

UL Sertifikası - UL Certificate

Rusya Onaylı Denizcilik Sertifikası - Rusya Denizcilik Certificate

Order Info

311149

311140