


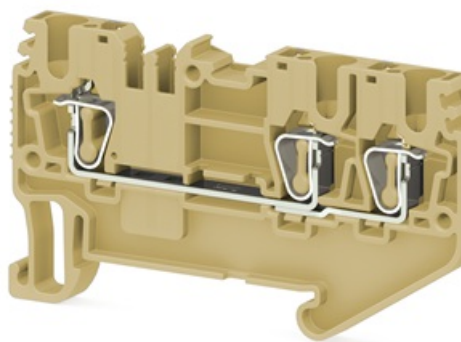

Klemmsan®

311080 SRD 2.5E

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V0
	Packing Unit	50
	Weight (g)	—
	Continuous Operating Temp.	(min.-max.)
	DIN-EN 45545Z	
Dimensions	Width	mm
	Length	mm
	Height (MR 32)	mm
	Height (MR 35x7.5)	mm
TSE / CE Technical Data	Nominal Voltage	V ~
	Nominal Current	A
	Cross Section	mm ²
	Nom	
VDE Technical Data	Nominal Voltage	V ~
	Nominal Current	A
	Cross Section	mm ²
	VDE Norm	
UL / CSA Technical Data	Nominal Voltage	V ~
	Nominal Current	A
	Cross Section	
ATEX Technical Data	Nominal Voltage	V ~
	Nominal Current	A

	Cross Section	
Connection Data	Minimum solid strand cross section	mm ²
	Maximum solid Strand cross section	mm ²
	Minimum fine Strand cross section	mm ²
	Maximum fine strand cross section	mm ²
	AWG Conductor Range	
	Connection Type	
	Insulation Stripping length	mm
	Tightening torque	Nm

Avrupa standartlarına uygunluk belgesi - CE Certificate

UL Sertifikası - UL Certificate

Rusya Onaylı Denizcilik Sertifikası - Rusya Denizcilik Certificate

	Order Info
	311089
	311081
	311080
	311083
	311084
	311085
	311087
	311082
	311086